



ColdTech – Culinary Coolness

Highlights:

- Solid, durable, two door, high grade, 300 series, stainless steel interior & exterior (except backs) providing commercial kitchens with a long-lasting, easy to clean refrigerator.
- Digital temperature controls on the outside of the unit for easy programming.
1° C to 6° C/33° F to 43° F
- The **ColdTech Commercial** Warranty: 3 years bumper-to-bumper & a total of 5 years warranty on the compressor. Call **ColdTech Commercial** directly for repairs & service 24/7/365. It's the best warranty in commercial refrigeration.
- We make it easy. Recessed door handles for easy cleaning, auto-defrost, & free standing with four, black casters for easy moving.
- Two movable, plastic coated, steel shelves holding up to 60 kg/132.3 lbs each.

Stainless Steel Two Door Commercial Undercounter Refrigerator CUR119-47



Features:

- Large gross capacity of 12 cu. ft./338 L to get the maximum amount of refrigeration per cabinet size.
- Ventilated cooling system.
- North American standard safety & sanitation.
- Stainless steel drip tray under the evaporator.
- Net weight: 108 kg/238.1 lbs & Gross weight: 136 kg/299.81 lbs.
- Efficient condenser and evaporator made from copper piping with aluminum fin for faster cooling and superior efficiency.
- Housing and liner material are durable, food safety friendly, high quality, 300 series stainless steel .
- Temperature ranges from 1° C to 6° C/33° F to 43° F



Watch Our Videos Online:
ColdTechCommercial.com/Videos

Stainless Steel

Solid, Durable high grade, 300-series, interior and exterior

Warranty

3 Years bumper to bumper & a total of 5 years warranty on the compressor

Digital Display

Digital temperature controls on the outside of the unit for easy programming

ColdTechCommercial.com
Toll free: 1-855-241-3251 FAX: 1-877-298-8278
email: info@coldtechcommercial.com





ColdTech – Culinary Coolness

Specifications:

Voltage: 115 volts/20 amp circuit

Amperage: 8.0 amps / 440 W

Compressor Power: 616 W

Hp: 5/6 horsepower

dB: 63

Free Standing

Gross Capacity: 12 cu. ft./338 L

Refrigerant Type:

CFC Free R134a

Blowing Agent:

CFC Free polyurethane

Temperature Range:

• 1° C to 6° C

• 33° F to 43° F

Thermostat/Temperature Display:

Digital

Doors: Self closing, recessed handles, 300 series stainless steel

Shelving: Plastic coated steel holds up to 60 kg/132.3 lbs

Casters: 4

Cord Length: 112 3/16"/2850 mm

Unit Dimensions (W x H x D):

1200 mm x 895 mm x 750 mm

47 1/4" x 35 1/4" x 29 1/2"

Carton Dimensions (W x H x D):

1270 mm x 980 mm x 820 mm

50" x 38 9/16" x 32 5/16"

Shipping Cube:


36.02 cu.ft/1.02 cbm

Net Weight: 108 kg/238.1 lbs


Gross Weight: 136 kg /299.81 lbs

Stainless Steel Two Door Commercial Undercounter Refrigerator CUR119-47

Elevation:

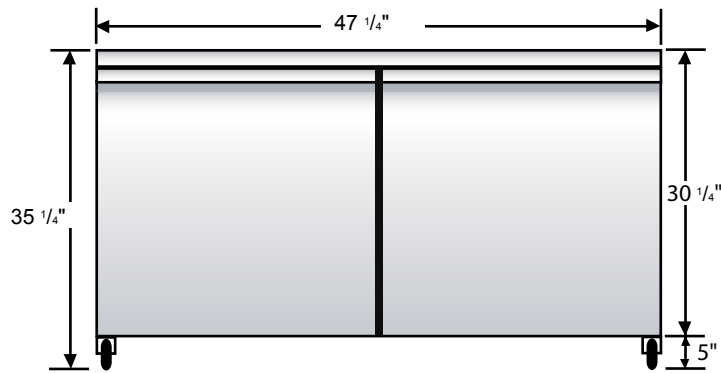

Top View:

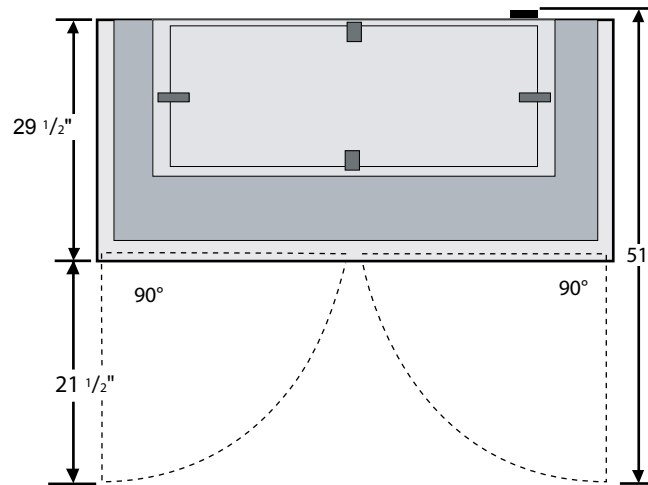

Plug:



5-15p

Certifications:



Specifications subject to change without notice. 031612

ColdTechCommercial.com

Toll free: 1-855-241-3251 FAX: 1-877-298-8278

email: info@coldtechcommercial.com

